

2003- 2004 Marauder

Step: 1

Using radio removal tools unclip radio. (See figure A)

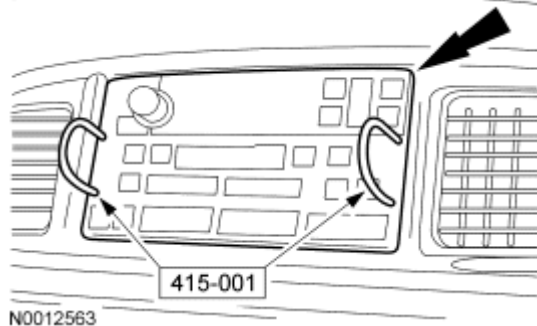


Figure A

Step: 2

Disconnect the 24 Pin Main Radio Connector and connect supplied 24 pin T-harness.

Step: 3

Route the harness across dash through passenger side behind glove box and up A-pillar.

* note if installing behind sun visor route cable up driver side

Step: 4

Remove A-pillar bezel by pulling cover towards center of vehicle.

Step: 8

Route Harness to opening cut in headliner and connect to Bluetooth unit.

Step: 9

Reassemble A-pillar molding/ Radio and Dash bezel.