

## 2004-2006 LS

### Step: 1

Using a non marring tool pull upward to remove the center console cup holder area.

### Step: 2


Remove four 7mm screws holding the ash tray assembly and remove.

### Step: 3

Remove the Center A/C register and disconnect.

### Step: 4

Remove radio assembly complete with A/C controls and disconnect.

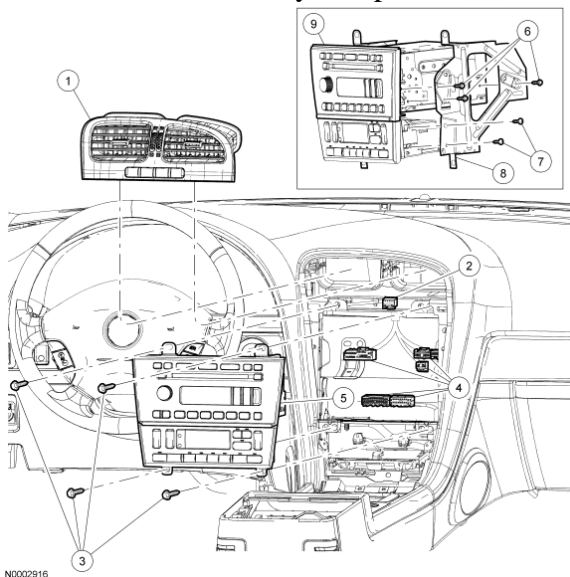

N0002916

### Exploded View

### Step: 5

Disconnect the 24 Pin Main Radio Connector and connect supplied 24 pin T-harness.

### Step: 6

Route the harness across dash through passenger side behind glove box and up A-pillar.

\* note if installing behind sun visor route cable up driver side

### Step: 7

Remove A-pillar bezel by pulling cover towards center of vehicle.

### Step: 8

Route Harness to opening cut in headliner and connect to Bluetooth unit.

### Step: 9

Reassemble A-pillar molding/ Radio and Dash bezel.