


## 2009 MKS

### Step: 1


Remove both sides of console trim. (See figure A)

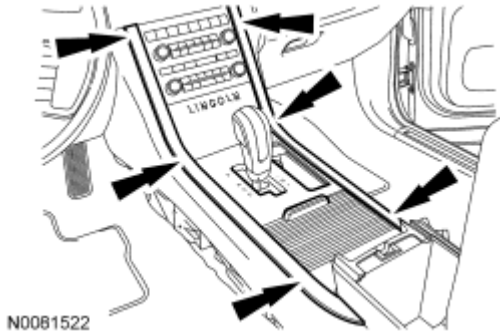

**Figure A**

### Step: 2

Remove center console center bezel. (See figure B)

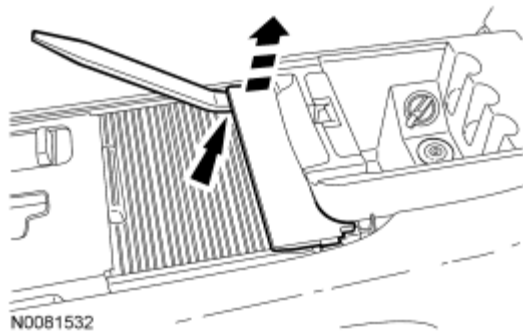

**Figure B**

### Step: 3

Remove two exposed screws now exposed.

### Step: 4

Remove four screws holding shift indicator bezel.

### Step: 5

Remove either four or six screws holding A/C cavity depending on with or without navigation.

### Step: 6

Remove four screws holding radio.

### Step: 7

Disconnect the 24 Pin Main Radio Connector and connect supplied 24 pin T-harness.

**Step: 8**

Route the harness across dash through passenger side behind glove box and up A-pillar.

\* note if installing behind sun visor route cable up driver side

**Step: 9**

Remove the A-pillar trim bezel by pulling on the upper part of the trim bezel toward the rear of the vehicle **careful not to damage the tether holding the A-pillar**. To fully remove bezel speaker must be disconnected.

**Step: 10**

Route Harness to opening cut in headliner and connect to Bluetooth unit **making sure not to cut in front of side curtain airbag unit. The harness must be between the vehicle metal and the airbag and not between the airbag and the plastic housing and or headliner.**

**Step: 11**

Reassemble A-pillar/ Radio/ Center Console and Dash bezel.